


GEN-X ULTRA 70W - 100W LED HIGHBAYS

70W- 100W LED ultra High Bay fittings are high output of 220lm/W with unique heatsink design that increases heat dissipation efficiency. With its phase change radiator technology means this highbay range operates cooler therefore increasing the life span. Coupled with a high quality "MEANWELL" driver this ensures the highest of quality.

Product Code	Voltage (V)	Wattage (W)	Luminous Flux (Lm)	Weight (Kg)	CRI	Beam Angle	Colour Temp	Ambient Temp Range
HBL70	240V AC	70W	1530	2.45	>80	120	3000-6000K	-30°C~+65°C
HBL100	240V AC	100W	21630	2.65	>80	120	3000-6000K	-30°C~+65°C

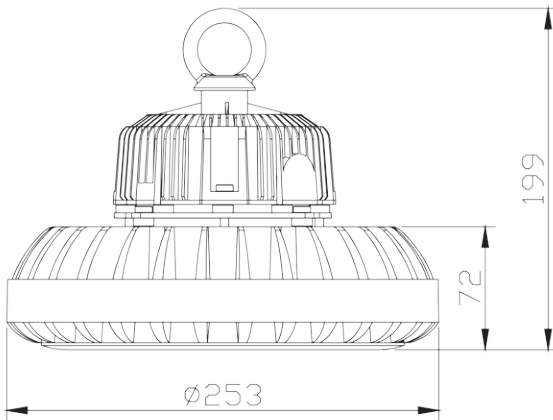

FEATURES

220Lm/W IP65

- Design for high-brightness
- 70W = 400W MH
- 100W = + 400W MH
- Competative pricing and high quality
- Light, smart and professional fixture design

BEAM ANGLE 120 DEG 70W			
Distance (M)	Avg/Max (lux)	Diameter (M)	
2	1344	16.66	
4	336	33.32	
6	149	49.98	

BEAM ANGLE 120 DEG 100W			
Distance (M)	Avg/Max (lux)	Diameter (M)	
2	1921	16.66	
4	480	33.32	
6	213	49.98	

